

Wired control units

Wind and sun protection control unit

SunWindControl SWC62

Sun/wind control unit*




- Intermediate positions can be programmed using UP/STOP/DOWN buttons
- Daily, block and weekly program
- Separate rain/temperature input, can be used as central input
- Date, time and threshold values preset
- Slide switch for easy changing between manual and automatic mode
- Automatic shade time individually adjustable
- Automatic summer/winter time adjustment
- Enables the programming of 2 freely selectable intermediate positions
- Single, group or central control unit
- Wind, light, rain and temperature sensors can be connected

Item no. 4033 000 041 0

Colour	Alpine white
Rated voltage	230 V/AC /50 Hz
Switching current	5 A /230 V/AC at $\cos \varphi = 1$
Battery type	CR 2032
Degree of protection	IP20
Permissible ambient temperature	0 to +55 °C
Type of mounting	Flush-mounted 58 mm diameter, wall mounting

* **Note:** Adapter frames can be found on page 66.

Dimensions

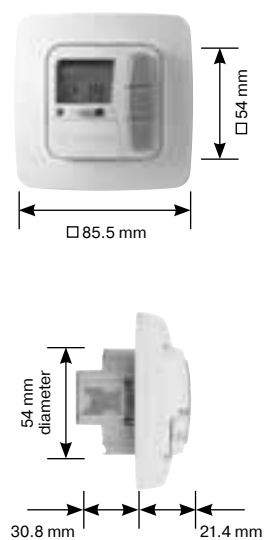

Functional principle – typical wiring diagrams

