

Centronic radio control units

Radio transmitters

TimeControl TC511a

Wall transmitter with timer*



- Weekly, block and daily switching program
- Astronomical function for morning and evening saves readjusting the switching times
- Holiday function and automatic summer/winter time adjustment
- Enables the programming of 2 freely selectable intermediate positions
- Light sensor SC43 can be connected
- Single or central control unit
- Preprogrammed date, time and switching time function

Item no. 4034 000 903 0

Colour	Alpine white
Rated voltage	3 V/DC
Battery type	LR03 (AAA)
Degree of protection	IP20
Permissible ambient temperature	-10 to +55 °C
Radio frequency	915.3 MHz
Type of mounting	Surface-mounted



SC43 light sensor

- Cable can be shortened

Item no. 4032 000 004 0 (2 m cable)

Item no. 4032 000 005 0 (5 m cable)

EasyControl EC142a-II

2-channel hand-held transmitter




- 2-channel with LED display
- Enables the programming of 2 freely selectable intermediate positions
- Single, group or central control unit
- Metal ring for attachment to key ring

Item no. 4034 000 910 1

Colour	Black
Rated voltage	3 V/DC
Battery type	CR 2032
Degree of protection	IP20
Permissible ambient temperature	-10 to +55 °C
Radio frequency	915.3 MHz

* **Note:** Adapter frames can be found on page 66.

Dimensions

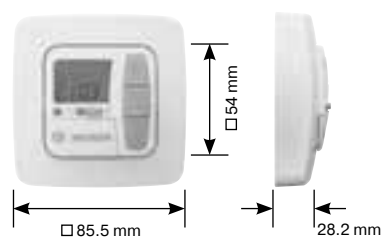

Functional principle – typical wiring diagrams

