

Centronic radio control units

Centronic SunWindControl SWC241A-II

1-channel hand-held transmitter for setting wind threshold values




- Enables the programming of two intermediate positions
- Einzel-, Gruppen- oder Zentralsteuerung
- Setting the threshold values possible directly on the device
- Integrated transmission pilot lights
- Rear labelling field
- Defined drive commands possible

Technical data

Centronic SunWindControl SWC241A-II	
Item number	4033 000 920 1
Rated voltage	3 V
Battery type	CR 2430
IP degree of protection	20
Class of protection	III
Permissible ambient temperature	-10 ... 55°C
Type of mounting	Hand-held device
Colour (control unit)	Black
Length of power line	0.0 m
Device cable length	0.0 m
Radio frequency (control unit)	915,3 MHz

Functional principle - sample wiring diagram

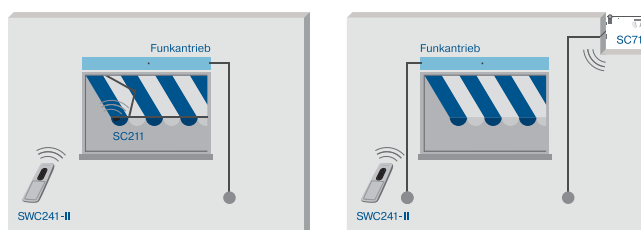

Master data

	Weight kg	GTIN / EAN Number	Customs tariff number
4033 000 920 1	0.122	4251852908419	85269200

* Product weight without accessories
5th September, 2023



BECKER

Centronic radio control units

Centronic SunWindControl SWC241A-II

1-channel hand-held transmitter for setting wind threshold values




- Enables the programming of two intermediate positions
- Einzel-, Gruppen- oder Zentralsteuerung
- Setting the threshold values possible directly on the device
- Integrated transmission pilot lights
- Rear labelling field
- Defined drive commands possible

Technical data

Centronic SunWindControl SWC241A-II	
Item number	4033 000 920 0
Rated voltage	3 V
Battery type	CR 2430
IP degree of protection	20
Class of protection	III
Permissible ambient temperature	-10 ... 55°C
Type of mounting	Hand-held device
Colour (control unit)	White
Length of power line	0.0 m
Device cable length	0.0 m
Radio frequency (control unit)	915,3 MHz

Functional principle - sample wiring diagram

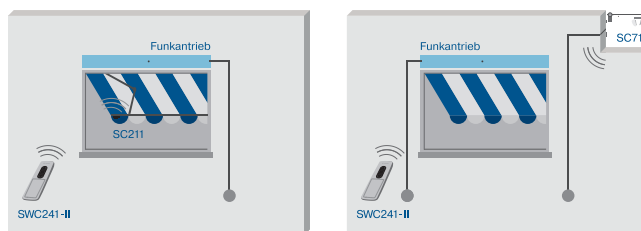

Master data

	Weight kg	GTIN / EAN Number	Customs tariff number
4033 000 920 0	0.120	4251852908402	85269200

* Product weight without accessories
5th September, 2023



BECKER