

Wired control units

Single and group control units

UnitControl UC42

Single and group control unit



- Can be combined with any switch range
- Simple installation behind the operator control in any deep flush-mounted switch box
- Can be integrated upstream of timers and sun protection controls
- Blind mode: Exact adjustment of blind laths in touch mode
- Potential-free connection is possible

Item no. 4031 000 003 0

Rated voltage	230 V/AC/50 Hz
Switching current	5 A/230 V/AC at $\cos \varphi = 1$
Degree of protection	IP30
Class of protection	II
Permissible ambient temperature	-40 to +70 °C
Type of mounting	Flush-mounted 58 mm diameter, wall mounting

UC45

Single and group control unit for switch cabinet mounting

Item no. 4031 000 004 0 (UC45)

UnitControl UC52

Single and group control unit*




- Slide switch for easy changing between manual and automatic mode
- An additional operator control can be connected
- Enables the programming of 2 freely selectable intermediate positions
- Blind mode: Exact adjustment of blind laths in touch mode

Item no. 4031 000 001 0




Colour	Alpine white
Rated voltage	230 V/AC/50–60 Hz
Switching current	5 A/230 V/AC at $\cos \varphi = 1$
Degree of protection	IP20
Class of protection	II
Permissible ambient temperature	0 to +55 °C
Type of mounting	Flush-mounted 58 mm diameter, wall mounting

* **Note:** Adapter frames can be found on page 66.

Dimensions

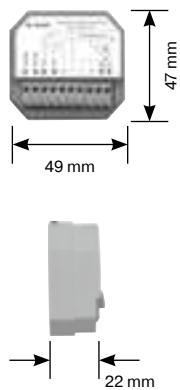

Functional principle – typical wiring diagrams

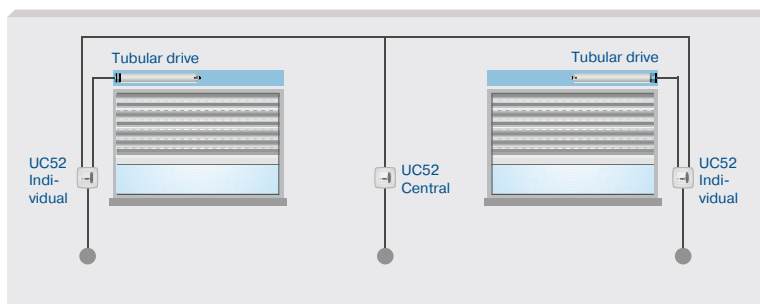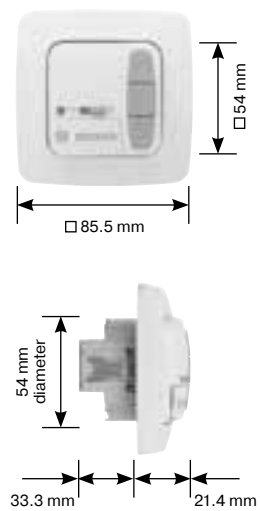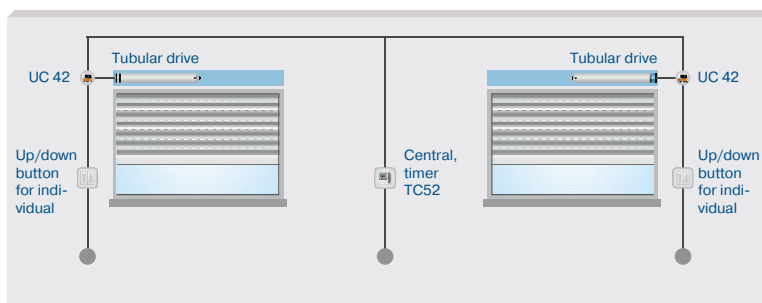

CONTROL UNITS

ELECTRICAL ACCESSORIES

MECHANICAL ACCESSORIES

APPENDIX

