

Centronic PLUS radio control units

Centronic EasyControl EC5416A PLUS




- Enables the programming of two intermediate positions per channel
- Single, group or central control unit
- Settings not lost even when battery changed
- Channels can be controlled independently from one another
- Enables the programming of one memory time each for the up and down direction
- Single channel assignment and group setup
- Automatic creation of group and central channels
- Automatic hiding of unused channels
- Simple start-up by automatic selection of the nearest receiver
- Mesh technology ensures the automatic networking of all devices to create a powerful network
- Automatic mode can be activated/deactivated simultaneously for individual channels or all channels on the operating device directly
- Automatic battery level indicator when inserting the batteries
- Multicolour display for simple status feedback and start-up
- Optical operating feedback via LED animations
- Defined drive commands possible

Technical data

Centronic EasyControl EC5416A PLUS	
Item number	4036 000 910 0
Rated voltage	3 V
Battery type	AA
IP degree of protection	20
Class of protection	III
Permissible ambient temperature	-10 ... 55°C
Type of mounting	Hand-held device
Colour (control unit)	White
Length of power line	0.0 m
Device cable length	0.0 m
Radio frequency (control unit)	915,3 MHz

Functional principle - sample wiring diagram

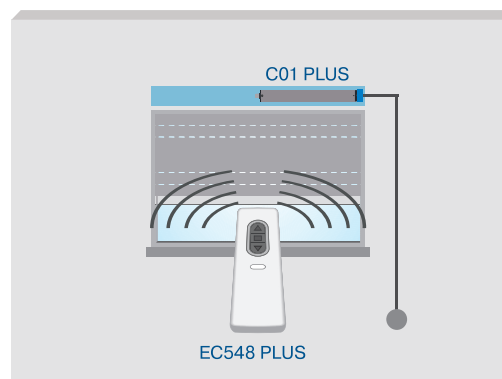

* Product weight without accessories
5th December, 2023



Centronic PLUS radio control units

Centronic EasyControl EC5416A PLUS



Master data

4036 000 910 0

Weight
kg

0.300

GTIN / EAN
Number

Customs tariff
number

85269200

* Product weight without accessories
5th December, 2023

